


Strong-J Standard Thick grip shape fully transferring the cutting force to the blade.



Tajima 

Tel +41 41 619 7010
Fax +41 41 619 7011
info@tajima.eu.com
Stansstadterstrasse 54
CH-6370 Stans Suisse

Tel +81-3-3969-6603
Fax +81-3-3969-7402
 3-4-3 Azusawa Itabashi-ku,
 Tokyo 174-8503 Japan



2021 items

TAJIMA's compact and solid tools represent high quality that lasts from the beginning throughout their lifetime. Tools that provide not only satisfaction but also inspiration. Our goal is for each encounter to develop into a long association.

2021 items

TAJIMA's compact and solid tools represent high quality that lasts from the beginning throughout their lifetime. Tools that provide not only satisfaction but also inspiration. Our goal is for each encounter to develop into a long association.

Tajima



2021
Special Issue

Super thick blade ideal for deep cutting and peeling



- Enable to use for peeling off the caulking material.
- Suitable for cutting thick materials such as carpet, thermal insulation, plasterboard, and plywoods.

The slider button is recessed below the gripping surface, minimizing the risk of auto lock release even when gripping with both hands.

| Art.Nr. |  |  | BLADE | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|-------------|---|---|--------------|------|---------------|----------------|---------------------------------------|
| DC690-Y1-10 | 22 mm | 10 | ENDURA-BLADE | 6 | 24 | 4975364 112507 | 2,934 (449/pc) |

POCKET TAPES



W-Thick Lock

The tape that does NOT FEAR WATER!



| Product | W-Thick Lock | A | B | C |
|----------------------|--|--|--|--|
| Tape coating | Nylon (coating) | Nylon (painting) | | |
| Tape length x width | 5 m x 25 mm | 8 m x 25 mm | 5 m x 19 mm | 5 m x 16 mm |
| Tape wear resistance | 4 5 6 7 8 1,000 or more repetitions | 1 8 65 45 47 46 Less than 50 repetitions | 2 4 48 5 48 5 Less than 150 repetitions | 4 5 4 48 5 Less than 50 repetitions |
| Superior Stand-Out | 2.3 m | 2.2 m | 2.1 m | 1.1 m |
| Rigidity (N) | 8.2 | 5.5 | 3.9 | 1.6 |
| Back surface | 37.2 | 26.7 | 18.6 | 5.1 |
| Hook strength (N) | 1,503 | 596 | 612 | 909 |

W-Thick Lock performance comparison

*1. They let an eraser made of sand go and back on a tape. The number indicates "how many times" an eraser did this action until the scale will be unreadable.
*2. This is our original way of showing how rigid the tape is. It is not bent or warped. The number indicates the force exactly the moment when the tape snaps by being added force.
*3. It indicates the maximum strength of the nail by falling. It means, you drop Convex (tape scored inside) but still the nail will not be broken.

| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|----------------|-------------|------|---------------|----------------|----------------------------------|
| GASP25-50E-EUR | 25 mm 5.0 m | 6 | 30 (5 SETS) | 4975364 122063 | 2,410 (353/pc) |

W-Mag

One person only can work when two should be needed.




W-MAG
Unique magnetic base tape measures with magnetic end hooks designed for fast one-person measurements in plumbing, steel stud framing, and metal fabrication applications.



Safety Belt Holder
The quick-fit belt holder enables you to attach & detach the housing on the holder with one hand.

| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|--------------------|-------------|------|---------------|----------------|----------------------------------|
| SFG3GLWM25-75E-EUR | 25 mm 7.5 m | 6 | 24 (4 SETS) | 4975364 122315 | 3,680 (540/pc) |

CUTTER KNIVES

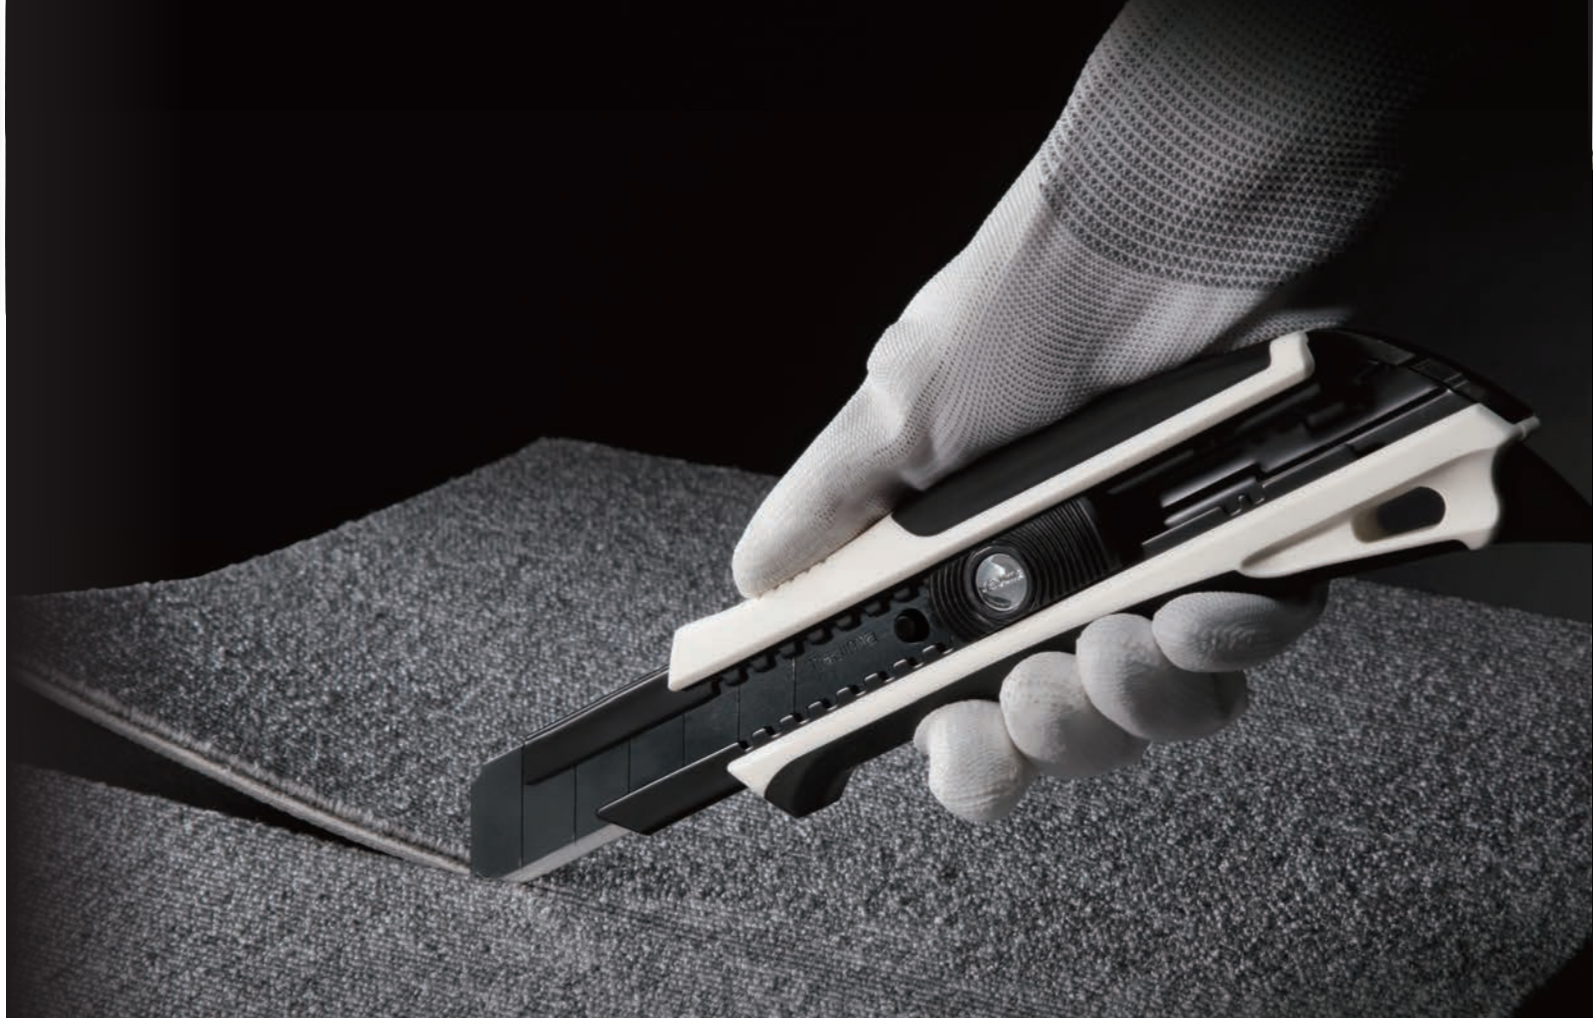

Drafin DFC670 / DFC671

Fully tempered blade sleeve with multi-function fin end. Can be used for opening tins and prying.



DFC670N-W1
AUTO LOCK




Super Hard Tip

The extended blade sleeve holds blade sturdily, preventing blade breakage.



DFC671N-W1
DIAL LOCK

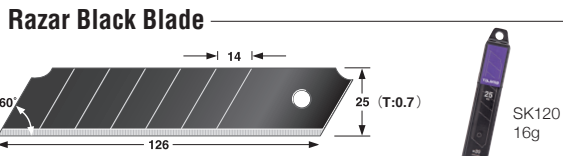

| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|----------------|----------|----------------------|------------------------|----------------|----------------------------------|
| C865FB -20H-K1 | 25 mm 20 | 10 (Spare blade 200) | 50 (Spare blade 1,000) | 4975364 112599 | 365 |

| Art.Nr. | FEATURES | BLADE | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|------------|----------|-------|------|----------------|-----|----------------------------------|
| DFC670N-W1 | 25 mm | 2 | 6 | 4975364 112514 | 203 | |
| DFC671N-W1 | 25 mm | 2 | 60 | 4975364 112521 | 230 | |

HAND SAWS & DRYWALL TOOLS




Japan Pull 265R Fluorine Black



JPR265FBR/Y1

GNB265FBP/-1

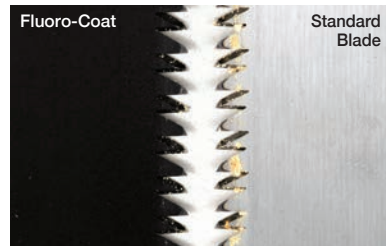

| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|--------------|---------------------------------------|------|---------------|----------------|----------------------------------|
| JPR265FBR/Y1 | 265 mm 1.75 mm 16 TPI 0.6 mm (0.9 mm) | 6 | 24 | 4975364 112538 | 230 |
| GNB265FBP/-1 | | 12 | 120 | 4975364 019707 | 96 |

Jab-Saw

To make a hole on a plasterboard. Rough cutting on the board.



N-G165JS-K1

NK-G165JS-1




Push it through drywall to make rough cut.

| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|-------------|--------------------------------------|------|---------------|----------------|----------------------------------|
| N-G165JS-K1 | 165 mm 3.75 mm 7 TPI 1.8 mm (2.1 mm) | 6 | 24 | 4975364 112705 | 143 |
| NK-G165JS-1 | | | | 4975364 112712 | 32 |

CAULK GUNS




Convoy® Super Sausage 2way



Available for 2way
Compatible with sausage and cartridge by removing the piston. No tool is needed for removing the piston.

QUICK PLUNGER


Uniquely designed front cap enables every ounce of material to be released from the tube.

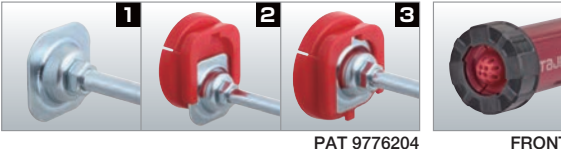

PAT 9776204

FRONT

Standard Accessories

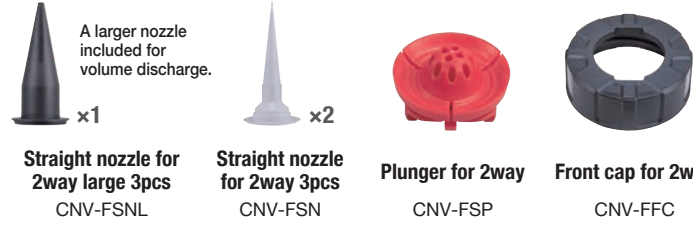


Straight nozzle for 2way large 3pcs CNV-FSNL

Straight nozzle for 2way 3pcs CNV-FSN


Plunger for 2way CNV-FSP

Front cap for 2way CNV-FFC

Cartridge

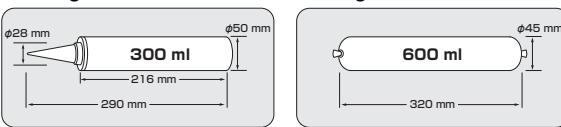

Sausage Pack



| Art.Nr. | FEATURES | CASE | MASTER CARTON | EAN | Weight (g) (Packaging + Product) |
|---------------|----------------------|------|---------------|----------------|----------------------------------|
| CNV-FSP600-R1 | 12 : 1 300 ml 600 ml | 4 | 16 | 4975364 266422 | 1,060 |